
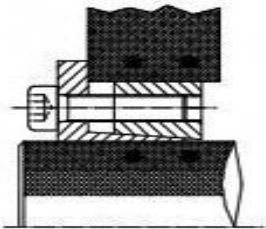


Z6 型胀紧套规格参数表

-----上海乙谛精密机械有限公司-----产品规格表-----

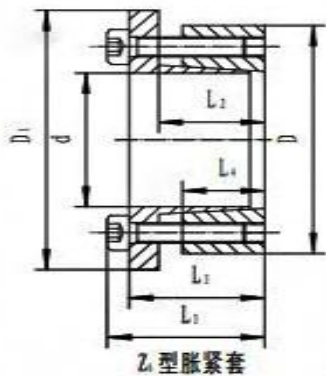

Z6 型胀紧套 d=14~50 M_k=0.127~1.830 KN·m

胀紧套基本尺寸								额定负荷		胀套与轴	胀套与轮	螺钉的拧紧力矩 MA N·m	重 量 kg
型 号	d	D	I	L	L 1	d1	n	轴向力 F1 KN	转 矩 M1 KN·m	结合面上 的 压 力 Pf N/mm ²	毂结合面 上的压力 Pf' N/mm ²		
	mm												
Z6-14X55	14	55	17	30	22	62	38	18	127	M8	3	25	208
Z6-16X55	16	55	17	30	22	62	38	18	142	M8	3	25	181
Z6-18X55	18	55	17	30	22	62	38	18	157	M8	3	25	161
Z6-19X55	19	55	17	30	22	62	38	18	165	M8	3	25	152
Z6-20X55	20	55	17	30	22	62	38	18	172	M8	3	25	145
Z6-22X55	22	55	17	30	22	62	38	25.5	285	M8	3	35	186
Z6-24X55	24	55	17	30	22	62	38	25.5	307	M8	3	35	170
Z6-25X55	25	55	17	30	22	62	38	25.5	315	M8	3	35	163
Z6-28X55	28	55	17	30	22	62	38	31.5	435	M8	3	41	175
Z6-30X55	30	55	17	30	22	62	38	31.5	472	M8	3	41	163
Z6-24X65	24	65	17	30	22	72	38	37.4	440	M8	5	30	244
Z6-25X65	25	65	17	30	22	72	38	37.4	460	M8	5	30	234
Z6-28X65	28	65	17	30	22	72	38	43.6	600	M8	5	35	243
Z6-30X65	30	65	17	30	22	72	38	43.6	640	M8	5	35	227
Z6-32X65	32	65	17	30	22	72	38	43.6	690	M8	5	35	213
Z6-35X65	35	65	17	30	22	72	38	52.5	910		5	41	234

Z6-38X65	38	65	17	30	22	72	38	52.5	990	M8	5	41	216
Z6-40X65	40	65	17	30	22	72	38	52.5	1050	M8	5	41	205
Z6-30X80	30	80	20	33	25	87	41	52.4	780	M8	7	30	232
Z6-32X80	32	80	20	33	25	87	41	52.4	830	M8	7	30	217.5
Z6-35X80	35	80	20	33	25	87	41	61	1060	M8	7	35	232
Z6-38X80	38	80	20	33	25	87	41	61	1150	M8	7	35	214
Z6-40X80	40	80	20	33	25	87	41	61	1220	M8	7	35	203
Z6-42X80	42	80	20	33	25	87	41	73.5	1540	M8	7	41	233
Z6-45X80	45	80	20	33	25	87	41	73.5	1650	M8	7	41	217
Z6-48X80	48	80	20	33	25	87	41	73.5	1760		7	41	203
Z6-50X80	50	80	20	33	25	87	41	73.5	1830	M8	7	41	195
注：Z6 型胀紧联结套螺钉的机械性能等级为 12.9 级。													